



PRODUCT INFORMATION SHEET

METAPP® #10-24 x L

MATERIAL GRADE

Carbon Steel, Grade C1022

DIMENSIONAL STANDARD

AS 3566.1, Modified

COATING OPTIONS

CORROSHIELD® OC Series

CORROSHIELD® SR Series

CORROSHIELD® CS Series

CORROSHIELD® HD Series

PRODUCT IDENTIFICATION

Engineering Edge Monogram



INSTALLATION GUIDE

RECOMMENDED TOOL

TORQUE	17 ~ 29Nm	SPEED	1,800 ~ 2,500RPM
--------	-----------	-------	------------------

*Electric screwdriver with torque clutch is recommended.

STEEL SUBSTRATE PARAMETERS

LEVIN® Point 3, LV: For Steel, Max. 4.5mm thick

ACCESSORY:



#2 X 25mm, Square Drive Bit

SHEAR PROPERTIES

NOTE: Shear test done using Universal Testing Machine at a speed rate of 3mm/min until failure.

Ultimate Shear Load (kN)	7.7
--------------------------	-----

TENSILE PROPERTIES

NOTE: Tensile test done using Universal Testing Machine at a speed rate of 3mm/min until failure.


Ultimate Tensile Load (kN)	9.0
----------------------------	-----

TORQUE PROPERTIES


NOTE: Torsional test done using Torque Wrench with a range up to 600 lb.in (~67.8Nm).

Ultimate Breaking Torque (Nm)	6.9
-------------------------------	-----

ULTIMATE SHEAR STRENGTH




ULTIMATE TENSILE STRENGTH



ULTIMATE BREAKING TORQUE



CONCEALED/SECRET FIX APPLICATION

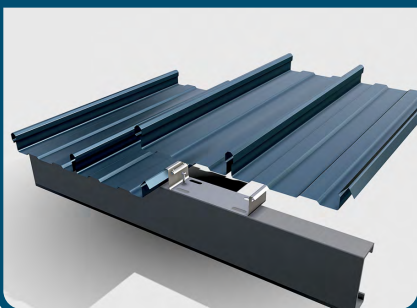

CONCEALED/SECRET FIX APPLICATION



CORROSHIELD®
F A S T E N E R S

DISCLAIMER

The statements, technical information and recommendations contained herein are believed to be accurate as of the date hereof. Values are derived average obtained from laboratory testing. Since the conditions and methods of use of the product and of the information referred to herein are beyond our control, Engineering Edge (S) Pty Ltd expressly disclaims any and all liability as to any results obtained or arising from any use of the product or reliance on such information; NO WARRANTY OF FITNESS FOR ANY PARTICULAR PURPOSE, WARRANTY OF MERCHANTABILITY OR ANY OTHER WARRANTY, EXPRESSED OR IMPLIED, IS MADE CONCERNING THE GOODS DESCRIBED OR THE INFORMATION PROVIDED HEREIN.